


Fitting and care advice for locking system cylinders

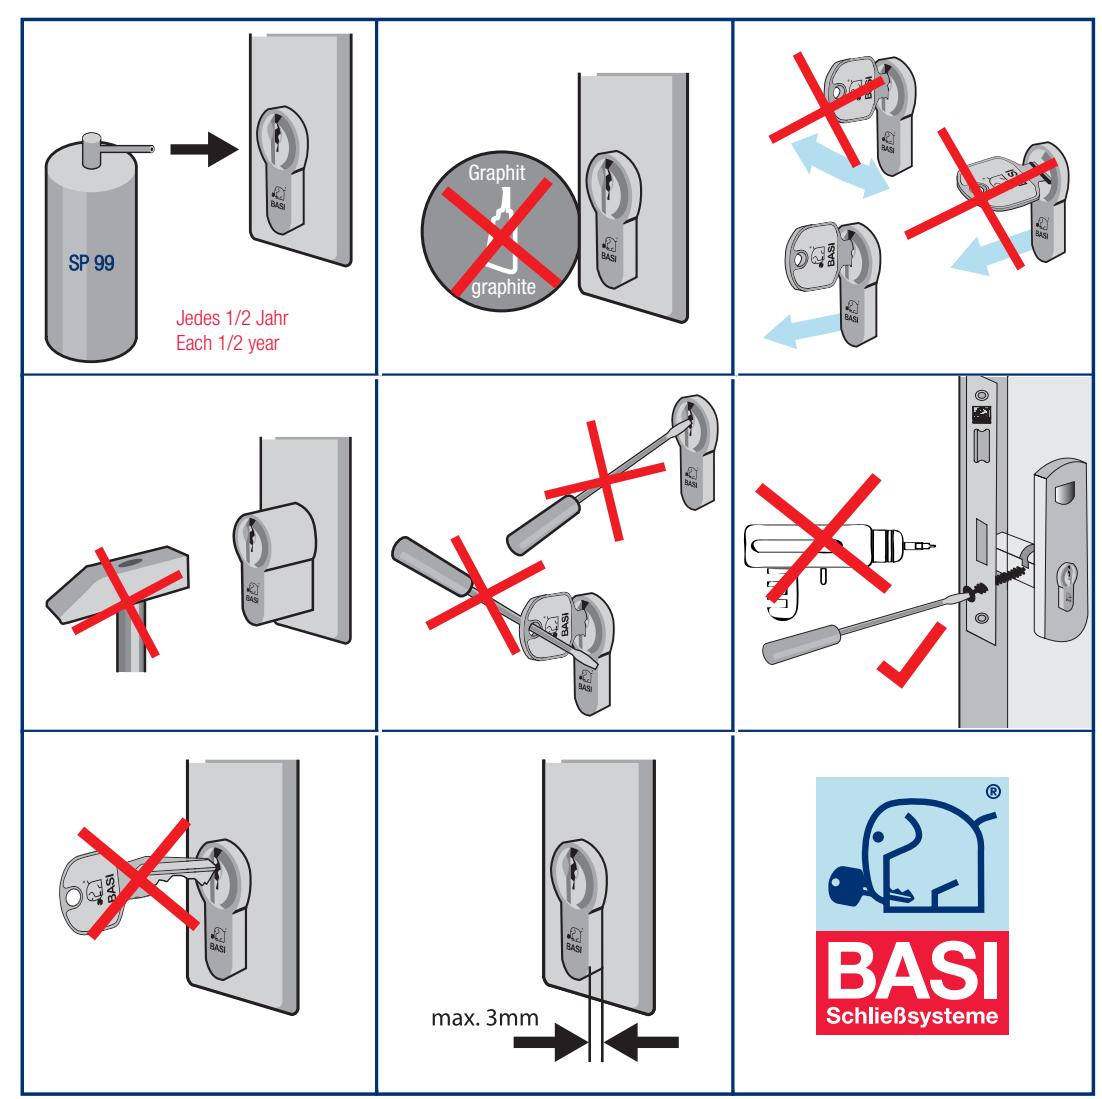

As part of the technical development of our products, the lubricant for our locking cylinders has been adapted to the state-of-the-art.

The Special Lubricant SP 99 is characterised by:

- Excellent lubricating properties
- Good wear protection
- Displaces water
- Infiltrates moisture
- Dissolves rust, dirt and residues
- Protects against corrosion
- Seals surfaces
- Free from silicones and acids

Please use our Special Lubricant SP 99, art. no. 4460-0099

Attention: Do not re-lubricate the locking cylinders with graphite!